


2429601 - 7040L20 tunnel trim - r r

 Removing ([Refitting](#) )

- [7040L28 tunnel switch panel - r r](#)
- [7040L22 REAR TRIM on TUNNEL -R.R.](#)


1. Release the cover.
2. Undo the bolts.

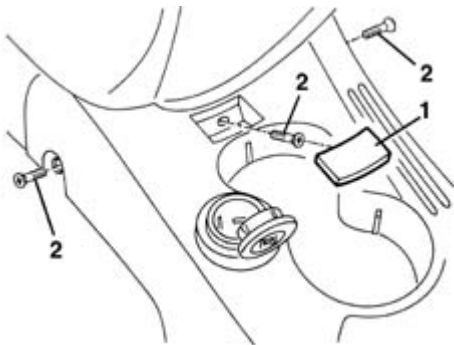

1. Unscrew the nuts.
2. Move the trim (2a) and disconnect the electrical connection (2b).

	Name	Connector
2b	Cigar lighter/current socket	P50

3. Keep the tunnel cover.

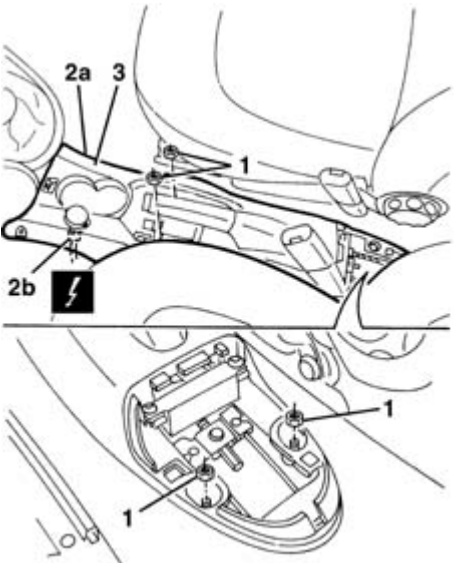

- [7065C72 front cigar lighter socket/power point - fasten](#) (if necessary)

 Refitting ([Removing](#) )

Check that the cover is undamaged.

- [7065C72 front cigar lighter socket/power point - fasten](#) (if necessary)

Connect the electrical connection.

Position the trim and tighten the nuts.

Tighten the bolts and fit the cover.

- [7040L22 REAR TRIM on TUNNEL -R.R.](#)
- [7040L28 tunnel switch panel - r r](#)