


[LANCIA](#) / [YPSILON](#) / [1.3 JTD](#) / [PROCEDURES](#) / [70 FITTINGS](#) / [7005 PASSENGER COMPARTMENT FRONT SIDE DOORS](#)
 / [7005C FRONT LOCK CONTROLS](#) / 7005C11 FRONT SIDE DOOR OUTSIDE HANDLE R R


2429488 - 7005C11 front side door outside handle r r

 Removing ([Refitting](#) )

1. Release the cover from the opening.
2. Working via the opening (2a), loosen the inner bolt (2b) in order to be able to release the lock barrel (2c).

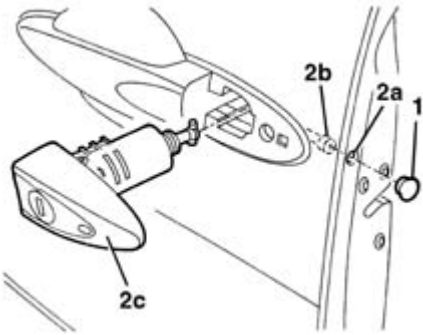

1. Remove the outer handle (1a) pulling it backwards as illustrated by the arrow (1b) and then turning the rear part (1c) towards the outside as shown by the arrow (1d).
2. Keep the seal.

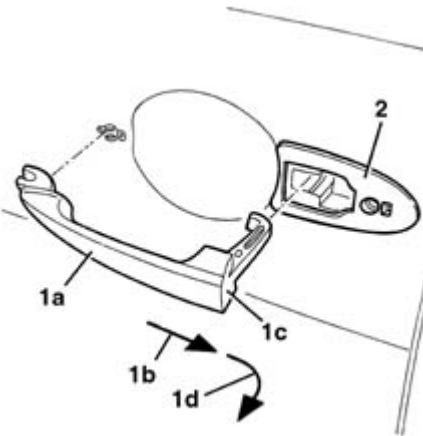

 Refitting ([Removing](#) )

Check that the handle and the seal are not damaged.

Position the gasket.

Fit the handle in position from the back and push it forwards until it is in the correct position.

Position the lock barrell, tighten the bolt and refit the cover.