


[LANCIA](#) / [YPSILON](#) / [1.3 JTD](#) / [PROCEDURES](#) / [70 FITTINGS](#) / [7005 PASSENGER COMPARTMENT FRONT SIDE DOORS](#)
/ [7005C FRONT LOCK CONTROLS](#) / 7005C52 INTERIOR OPENING HANDLE - R R

2429496 - 7005C52 interior opening handle - r r

 Removing ([Refitting](#) )

Lower the window.

1. Disconnect the cable (1a) from the retainers (1b).
2. Use a drift and remove the pin (2a) removing it upwards Keep the spring (2b) and the handle (2c).

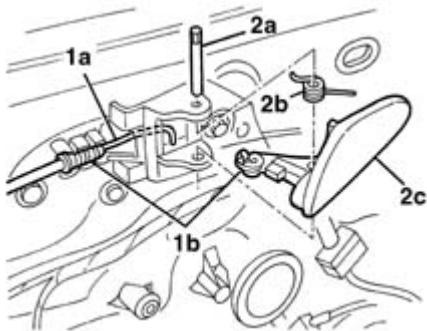


 Refitting ([Removing](#) )

Check that the handle is undamaged.

Fit the handle.

Refit the spring (1a) in place with the ends (1b) and (1c) in the housings shown in the diagram to produce a slight pre-loading at the end of the fitting process.

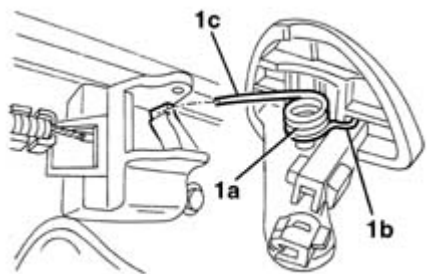

Fit the pin in position.

Connect the cable to the retainers.

Test the operation of the handle.